


## ACOUSTIC STATEMENT

### ABSORPTION (RAFT CEILING)

<b>Acoustic infill</b>	:	18mm x 80kg/m <sup>3</sup> black tissue wrapped mineral wool.
<b>Perforation</b>	:	1522 (1.5Ø holes, 22% free area) with 10mm plain borders.
<b>Panel specification:</b>	:	2400 x 1000mm wide perforated raft ceiling panels.
<b>Void depth</b>	:	600mm
<b>Test reference</b>	:	AB/10 26046111 - 05
<b>Sponsor</b>	:	SAS International
<b>Date</b>	:	28 <sup>th</sup> August 2013
<b>Test method</b>	:	NF EN ISO 354:2004

### RESULTS

Freq (Hz)	A in m <sup>2</sup>
100	0.50
125	1.10
160	1.40
200	1.90
250	1.80
315	1.70
400	2.20
500	2.60
630	2.70
800	3.10
1000	3.40
1250	3.90
1600	4.20
2000	4.30
2500	4.40
3150	4.40
4000	4.60
5000	4.50

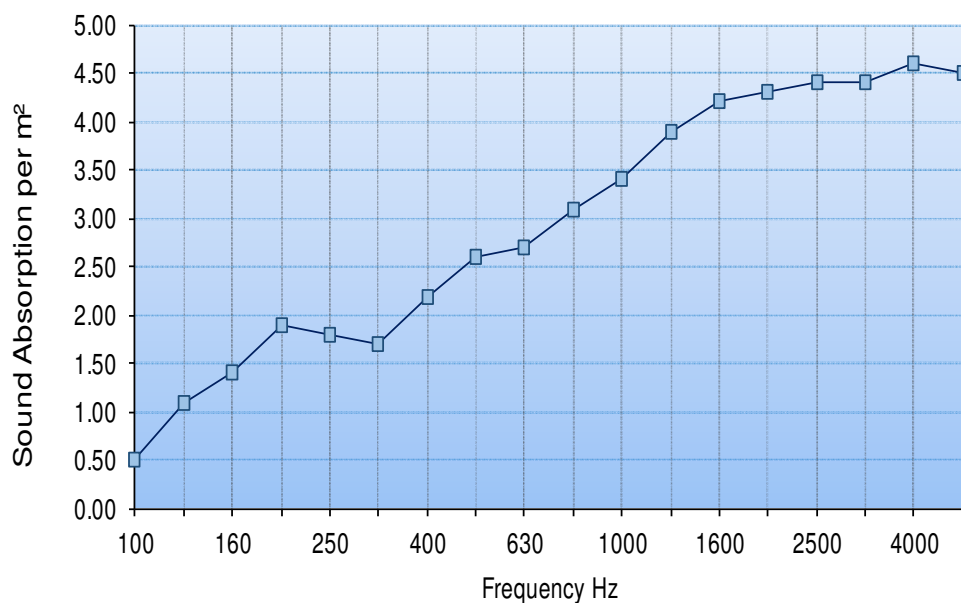

### Expression of Results: Calculation of the single figure Index $\alpha_w$ in accordance with NF EN ISO 11654: 1997

The measurement methodology and associated analysis results in absorption coefficients greater than unity. This is due to diffraction at the edge of the sample and is considered within the measurement standard by specifying the sample dimensions and perimeter detailing.

Data shown has been extracted from tests sponsored by and undertaken on behalf of SAS International Limited by a UKAS accredited independent laboratory. The results shown can only be considered to be indicative of the system. They are a reflection of the prevalent environmental conditions at the time of testing only. These results should not be considered as an infallible assessment of the Project specific requirements. Project environmental factors may differ considerably to the test environment and should not be considered to be equal or equivalent.

**Please note:** Tests are carried out with mineral wool acoustic inlays which are wrapped and sealed in polyethylene bags and laid over a black tissue. Additional details are available on request.